



NOT SHOWN:


- | | | |
|------------------------|-----------------------------|---------------|
| CONSOLE IN CAB | 1 - DRY CHEM EXTINGUISHER | 3 KW INVERTER |
| 1 - 6" BARREL STRAINER | 1 - WATER FIRE EXTINGUISHER | AIR PRIMER |
| 1 - RUBBER Mallet | 1 - CO2 FIRE EXTINGUISHER | |
| TRACTION CHAINS | 2 - AXES | |

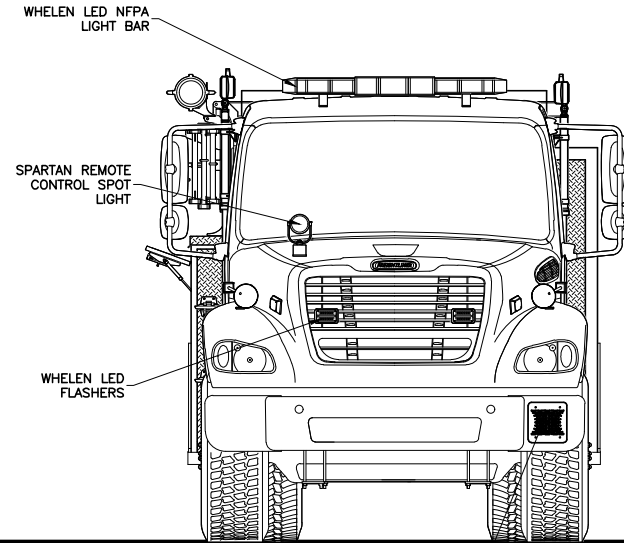

FRONT

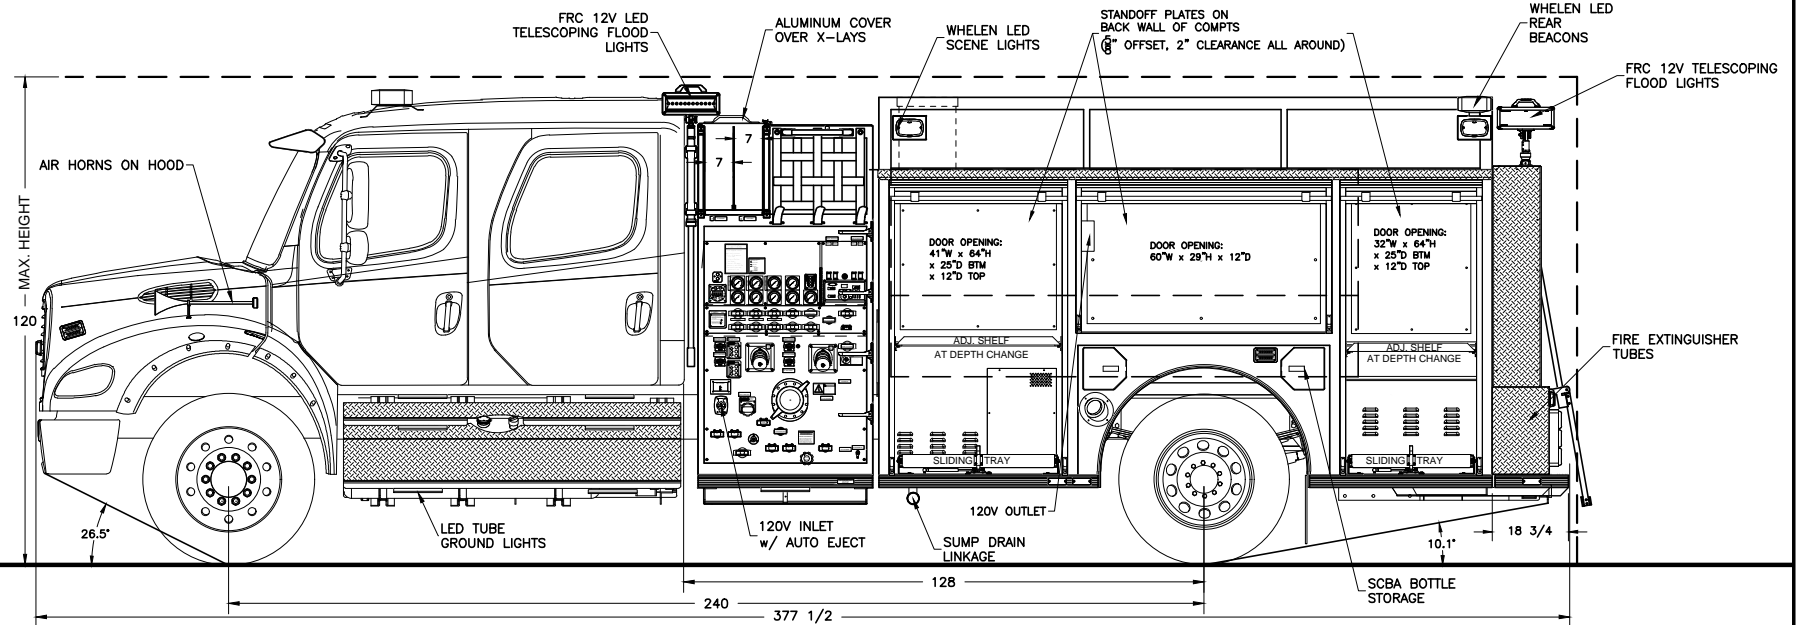

LEFT SIDE

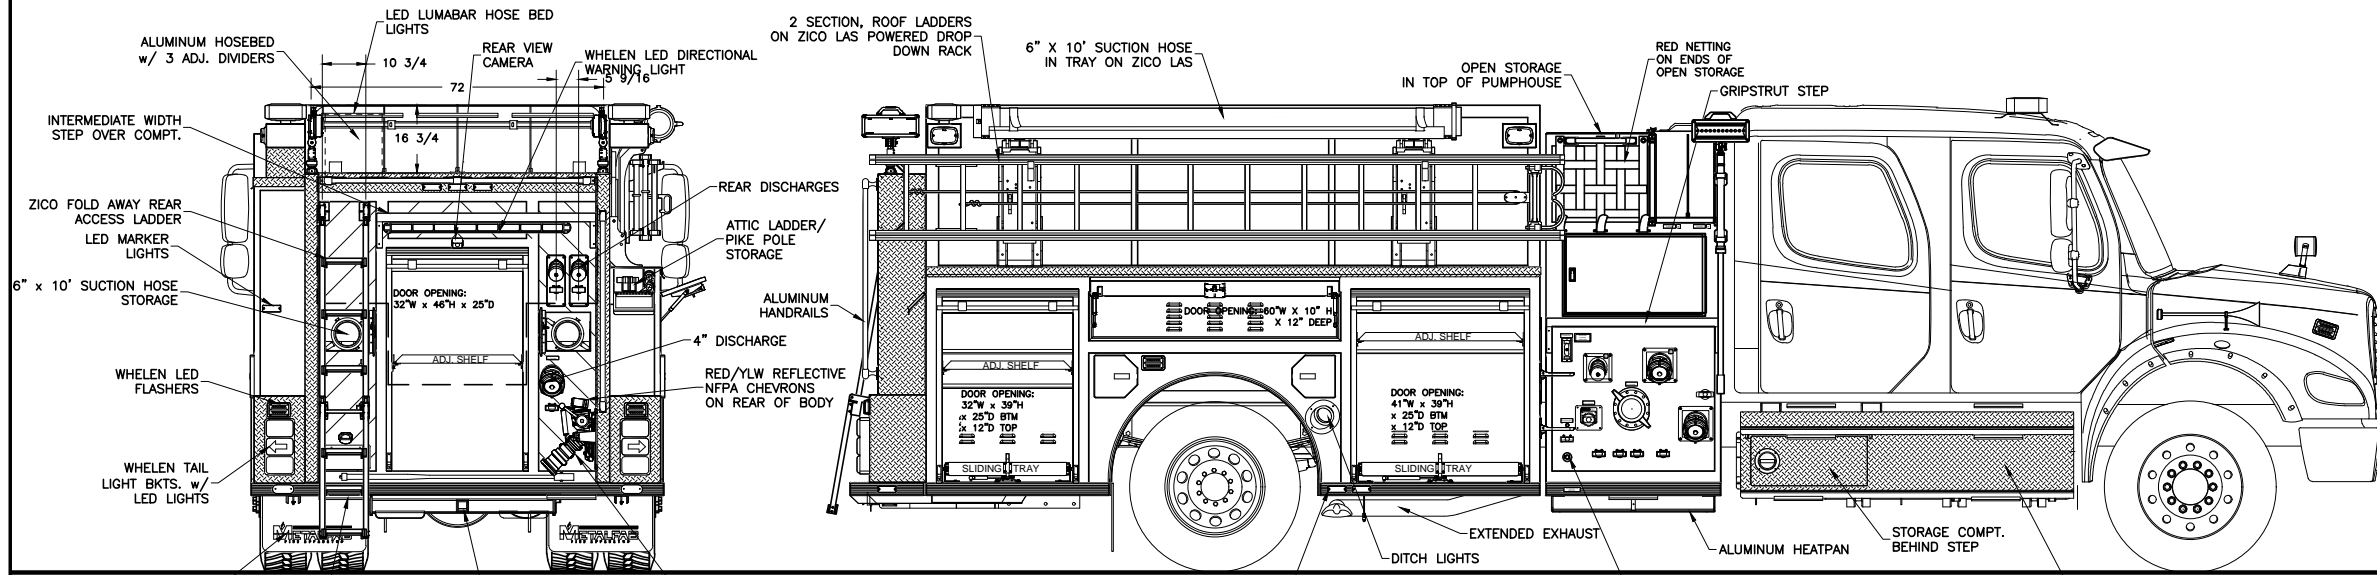

REAR

RIGHT SIDE

CHASSIS: FREIGHTLINER M2 112 4 DOOR
 PUMP: HALE QMAX 1250 IGPM
 TANK: 1000 Imp. Gal. POLYPROPYLENE
 1 - 20 Imp. Gal. FOAM CELL
 FOAM: FOAMPRO 2001

SUCTION: 1 - 6" LEFT (ELEC GATE)
 1 - 6" RIGHT (ELEC GATE)
 1 - 3" TANK TO PUMP
 1 - 4" RIGHT

DISCHARGES: 1 - 4" RIGHT
 1 - 4" REAR
 2 - 2 1/2" LEFT
 1 - 2 1/2" RIGHT
 2 - 2 1/2" REAR
 1 - 2" TANK FILL
 2 - 1 1/2" CROSSLAYS

3	UPDATED TO C/O A*	TEC	10-04-16
2	UPD'D PRE-S. ORDER REVIEW	JFO	
1	FIRST ISSUE		
REV	DESCRIPTION	APVD BY	DATE

REVISIONS		TITLE: GENERAL ARRANGEMENT	
HEBBVILLE FIRE DEPARTMENT			
JOB NO.	19129		
DRAWN BY	T CULLINS		
DATE	03-07-16		
METALFAB LTD. 847 CENTRAL ST. CENTREVILLE NB. CANADA E7K 2E8		DRAWING NO.	FT-10623
		REV	3

-ALL ALUMINUM CONSTRUCTION - ALL DIMENSIONS ARE IN INCHES & APPROXIMATE