NOT SHOWN:

*VEHICLE DATA RECORDER
*BATTERY BOOST TERMINALS
*MASTER BATTERY DISCONNECT
*BACK-UP ALARM
*GROENEVELD AUTO GREASING SYSTEM
*HEAT EXCHANGER
VMUX MULTIPLEX ELEC. SYS.
ELECTRIC PRIMER
1-SSRV
FRC PUMP BOSS ENG. GOVERNOR

1-CUSTOMER RADIO PROVISION
3-120V SHORELINE OUTLETS
FEDERAL PA300 100 WATT SIREN IN CAB
ANODES IN PIPING
ENGINE COMPT. LIGHT
TIRE PRESSURE INDICATORS
NON REMOVABLE KEY
CUSTOM CONSOLE IN CAB
LED TUBE COMPT LIGHTING
DOOR AJAR WARNING LIGHT

7-AMDOR PULL DOWN STRAPS
COMPT. FLOOR MATTING
KROWN UNDERCOAT
REFLECTIVE STRIPING
HEATER IN PUMP COMPT.
TARP OVER HOSEBED

LABELS:

FLUID CAPACITY PLATE
PUMPING TEST PLATE
MAX. RIDERS SIGN(5 PERSONS)
SEAT BELT WARNING LABEL(4 DR)

4-DO NOT WEAR HELMET LABELS
APPARATUS INFO. LABEL
REAR STEP WARNING LABEL
ULS DIESEL ONLY LABEL

FOAM CONCENTRATE LABEL
FOAM SYSTEM INS. LABEL
"DO NOT MOVE APPARATUS" LABEL
WARNING LABEL ON OPERATORS PANEL

ACCESORIES:

2-6"X10' LIGHTWEIGHT SUCTION HOSE
3-CLARE DOUBLE WRENCH SET
1-10' PIKE POLE
1-8' PIKE POLE
1-24' 2 SECTION LADDER
1-14' ROOF LADDER

1-10' FOLDING ATTIC LADDER
1-EXT. BRACKET(SHIP LOOSE)
*4-BOSTROM SECUREALL KITS
2-LARGE FOLDING WHEEL CHOCKS
4-PORTABLE HAND LIGHTw/CHARGER
5-ZICO UHH-1 HELMET HOLDER

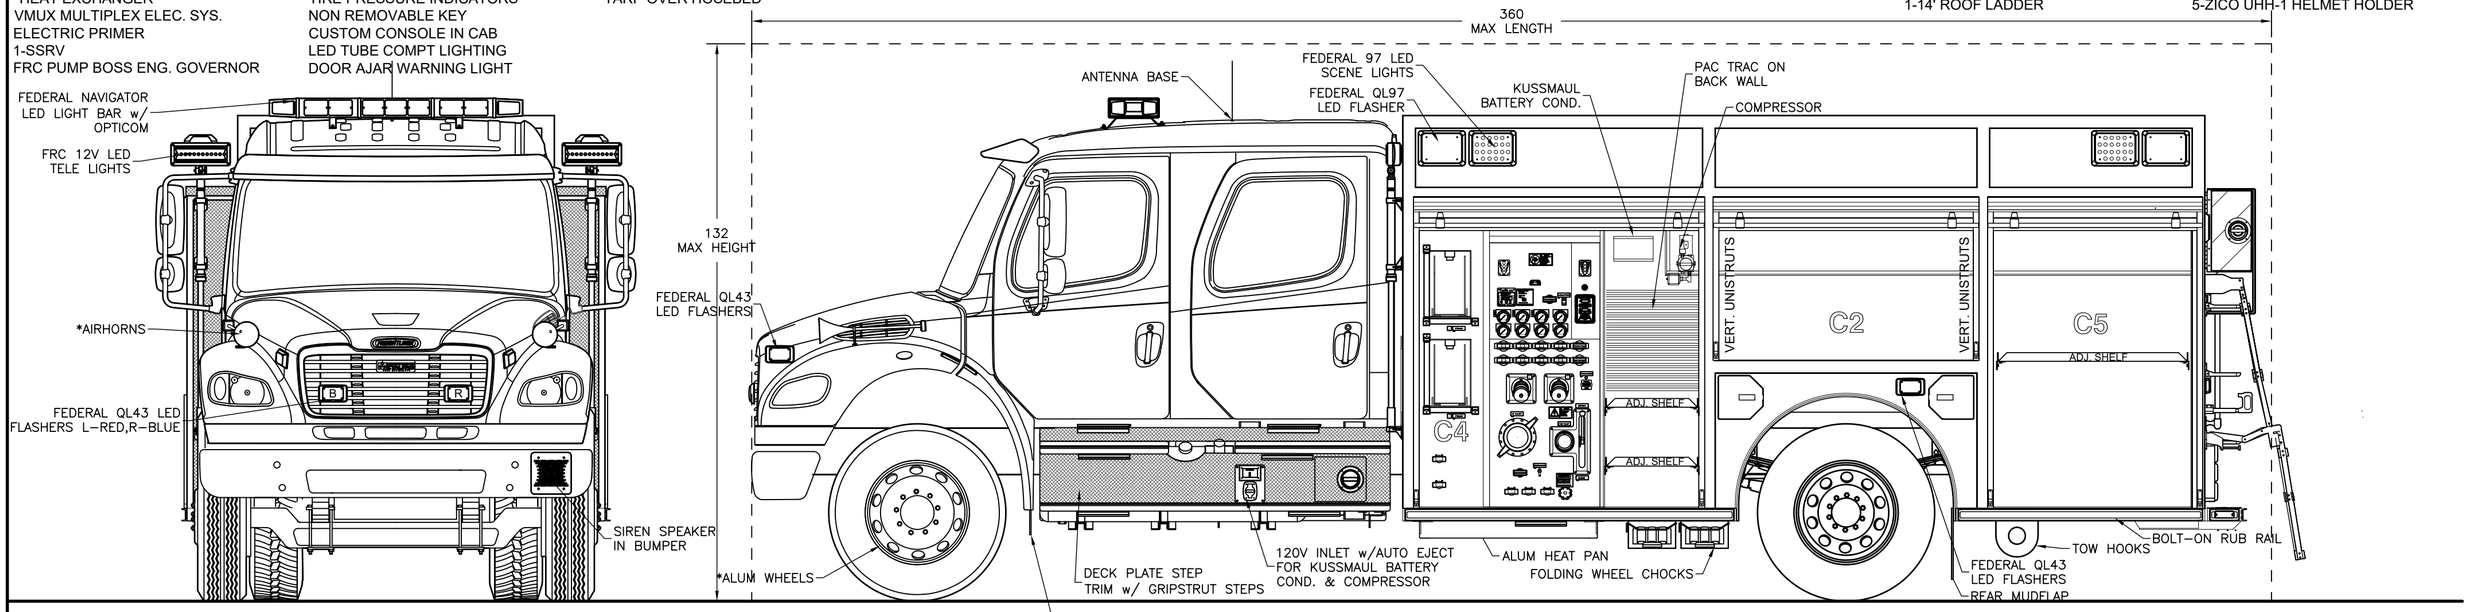

FRONT

LEFT SIDE

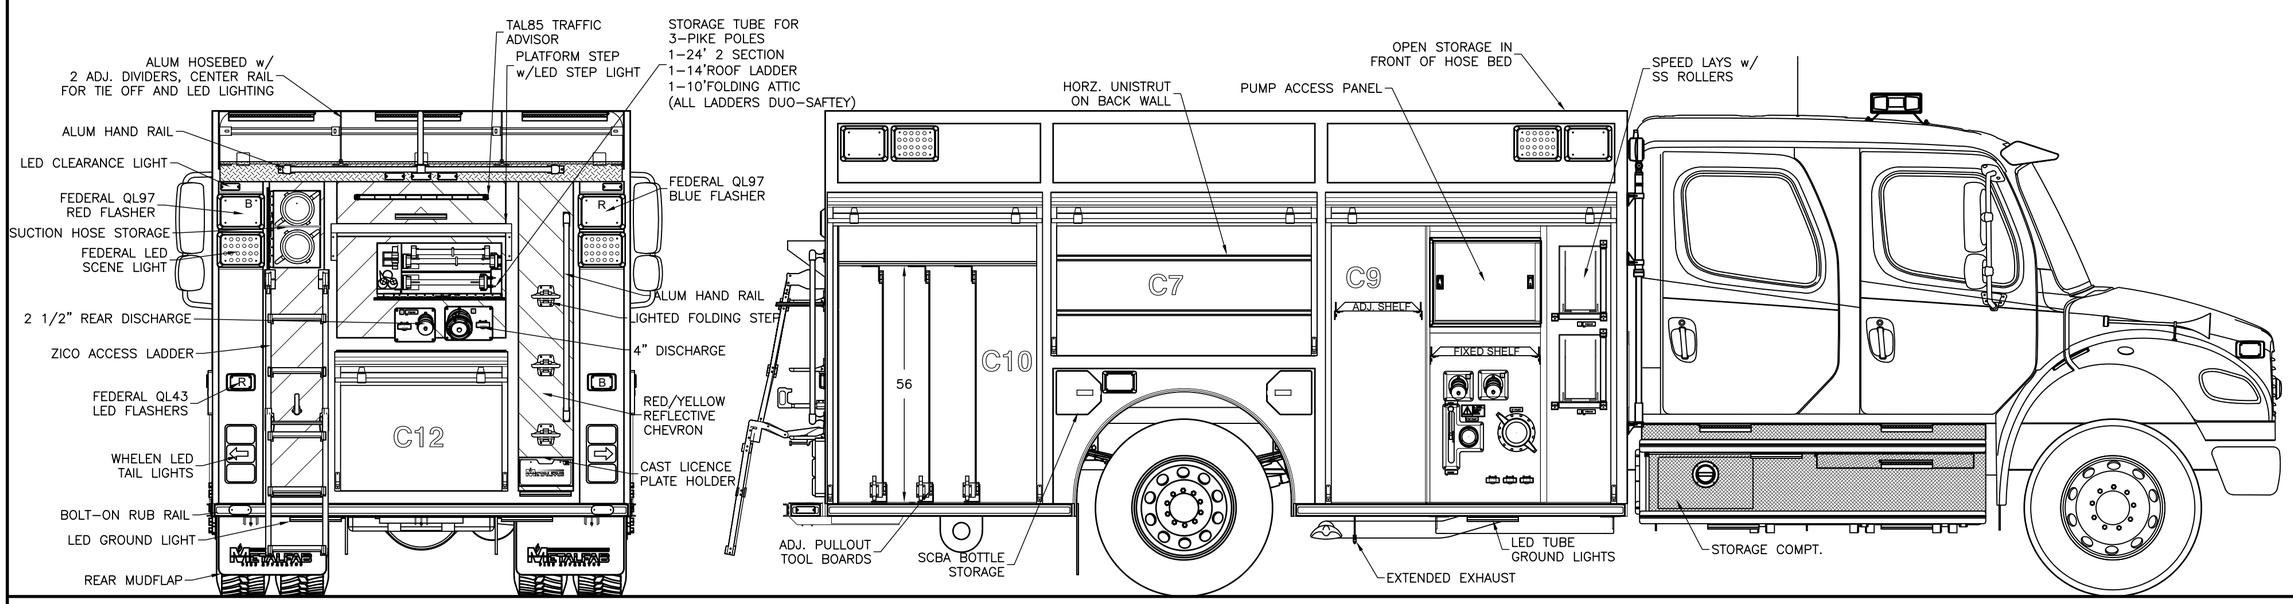

REAR

RIGHT SIDE

CHASSIS: FREIGHTLINER M2 106 4 DOOR
PUMP: HALE DSD 1250 IGPM MIDSHIP
TANK: 600 Imp. Gal. POLYPROPYLENR
1 – 25 Imp. Gal. FOAM CELL

FOAM: FOAMPRO 1600

SUCTION: 1 – 6" LEFT (NO GATE)
1 – 6" RIGHT (NO GATE)
1 – 3" TANK TO PUMP (4"PIPING)
1 – 2 1/2" LEFT
1 – 2 1/2" RIGHT

DISCHARGES: 1 – 4" REAR
2 – 2 1/2" LEFT (1 FOAM)
2 – 2 1/2" RIGHT
1 – 2 1/2" REAR
1 – 2" TANK FILL
2 – 1 1/2" SPEEDLAYS (FOAM)

*–INCLUDED WITH CHASSIS

THE CORP. OF THE TOWN OF THE BLUE MOUNTAINS

JOB No.	19918
DRAWN BY	E SMITH
DATE	03–19–2018

METALFAB LTD.
847 CENTRAL ST. CENTREVILLE
NB. CANADA E7K 2E8

TITLE: GENERAL ARRANGEMENT

METALFAB FIRE TRUCKS

DRAWING NO. 19918-19

REV 0