
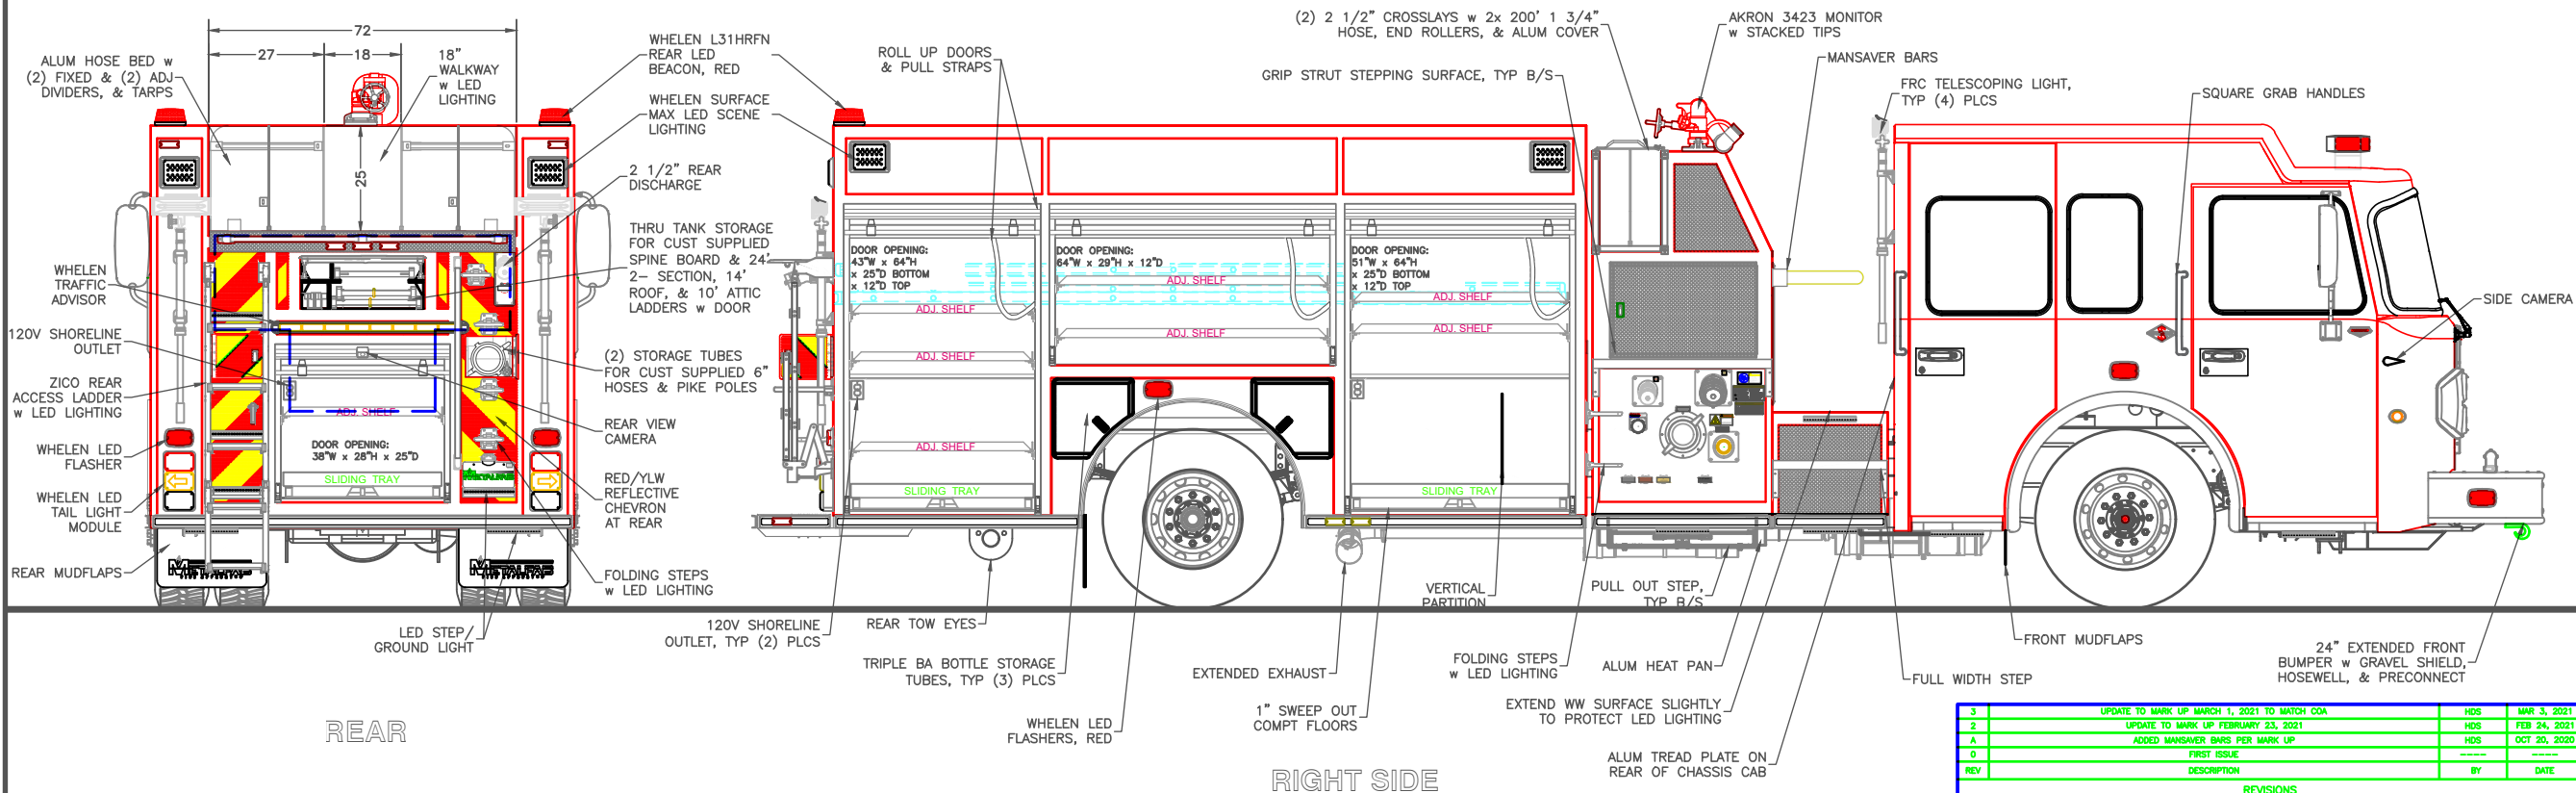


NOT SHOWN:  
 ULC & NFPA 1901 COMPLIANCE  
 DOOR AJAR LIGHT IN CAB  
 COVER TARP OVER HOSE BED  
 END TARPS ON CROSSLAYS

INTERLOCKING PLASTIC TILE COMPT. FLOOR MATTING  
 MULTIPLEX ELECTRIC SYSTEM  
 200 WATT SIREN  
 LED TUBE COMPARTMENT LIGHTS

LED ENGINE COMPARTMENT LIGHTS  
 BATTERY CONDITIONER  
 BACK UP ALARM

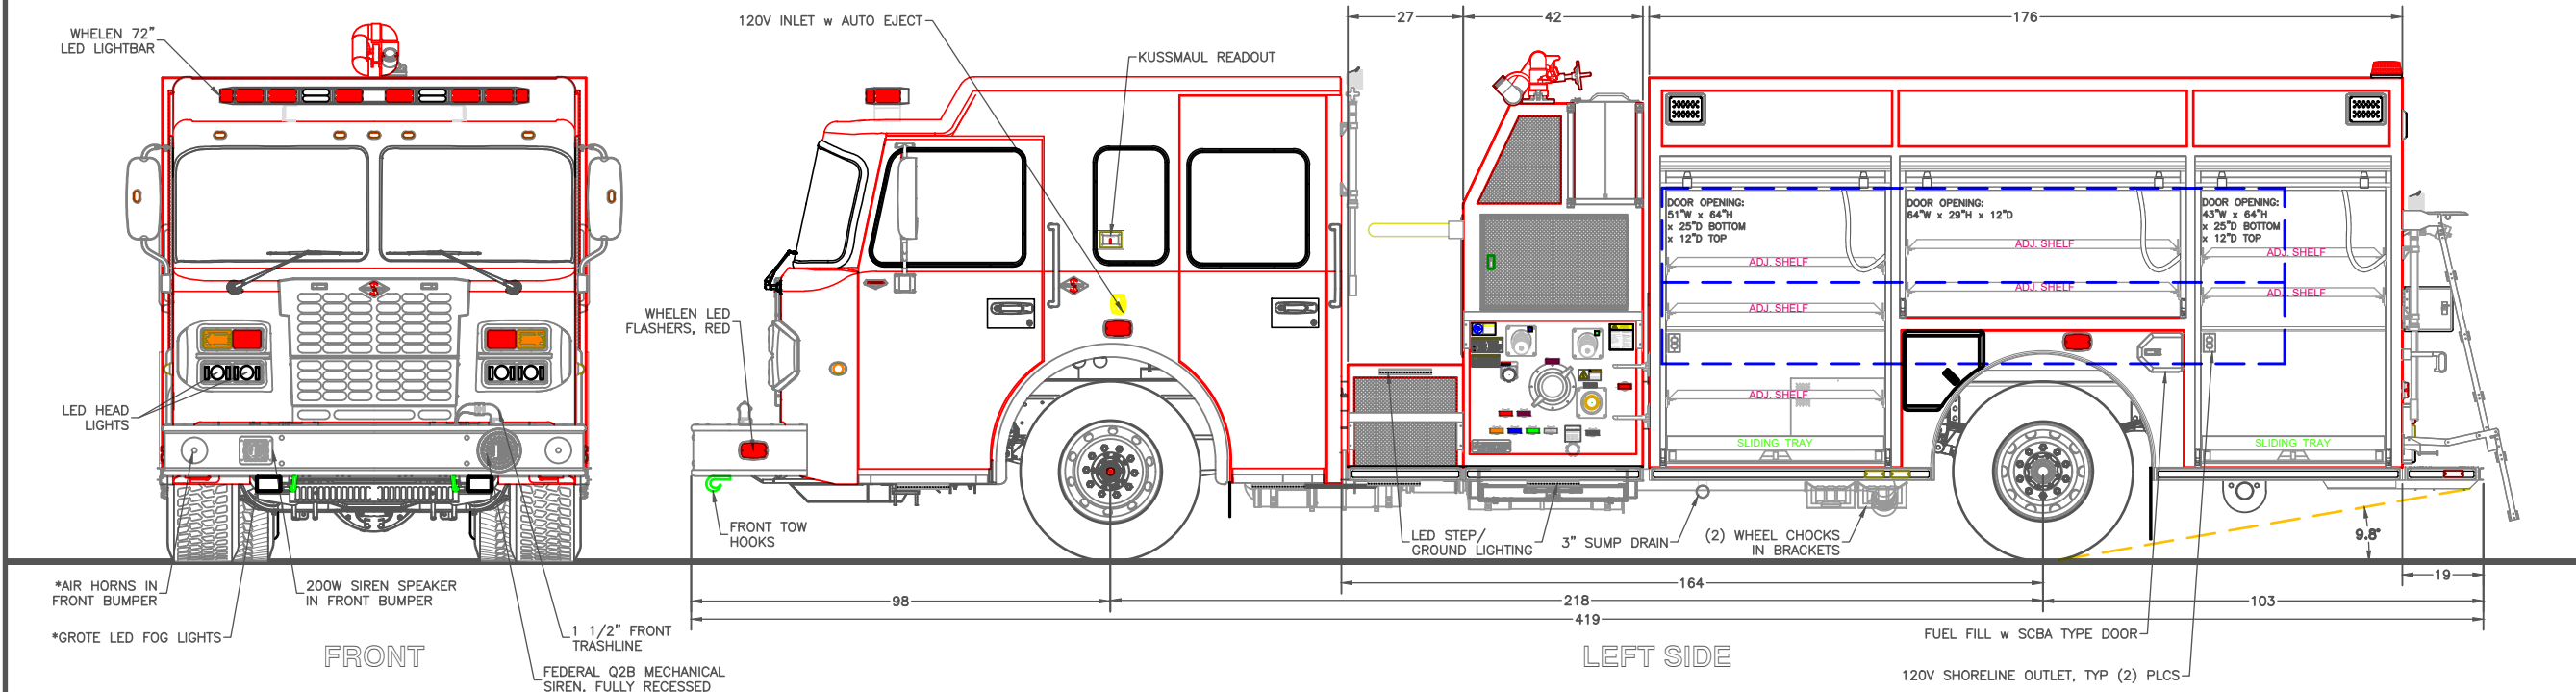

REV	DESCRIPTION	BY	DATE
3	UPDATE TO MARK UP MARCH 1, 2021 TO MATCH COA	HDS	MAR 3, 2021
2	UPDATE TO MARK UP FEBRUARY 23, 2021	HDS	FEB 24, 2021
A	ADDED MANSERVER BARS PER MARK UP	HDS	OCT 20, 2020
0	FIRST ISSUE		

CHASSIS: SPARTAN METROSTAR MFD 10" RAISED ROOF  
 PUMP: HALE QMAX 1250 IGPM MIDSHIP  
 TANK: 800 IMP GAL POLYPROPYLENE  
 1-20 IMP GAL FOAM CELL  
 FOAM: FOAMPRO 2001

SUCTION: 1 - 6" LEFT (ELECTRIC GATE)  
 1 - 6" RIGHT (ELECTRIC GATE)  
 1 - 3" TANK TO PUMP  
 1 - 2 1/2" LEFT (TM CONTROLLED)  
 1 - 2 1/2" RIGHT (TM CONTROLLED)

DISCHARGES: 1 - 5" RIGHT (4" PIPING)  
 1 - 3" MONITOR  
 1 - 2 1/2" RIGHT  
 2 - 2 1/2" LEFT  
 1 - 2 1/2" REAR  
 2 - 1 1/2" CROSSLAYS (2 1/2" PIPING\_FOAM)  
 1 - 2" TANK FILL  
 1 - 1 1/2" TRASHLINE (FOAM)

CBRM CUSTOM TOP MOUNT PUMPER		TITLE GENERAL ARRANGEMENT	
JOB No.	21876		
DRAWN BY	HDS		
DATE	OCTOBER 7, 2020		
METALFAB LTD. 847 CENTRAL ST. CENTREVILLE NB. CANADA E7K 2E8		DRAWING NO.	FT-11409
		REV	3

-ALL ALUMINUM CONSTRUCTION - ALL DIMENSIONS ARE IN INCHES & APPROXIMATE - \* WITH CHASSIS