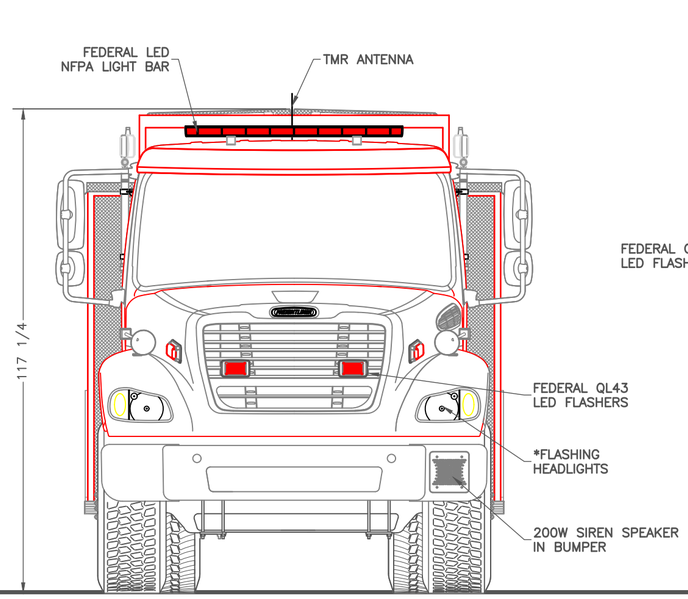

FRONT

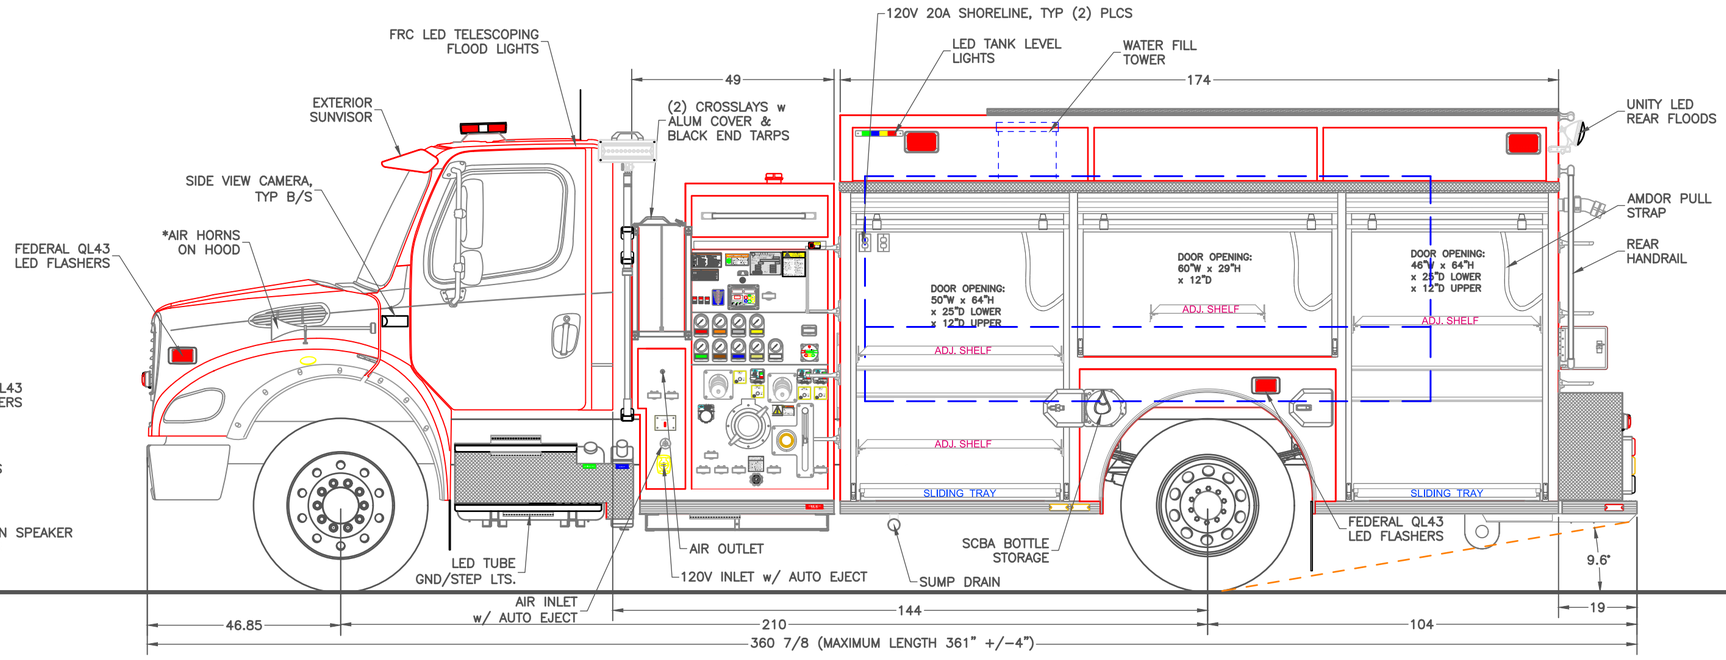

LEFT SIDE

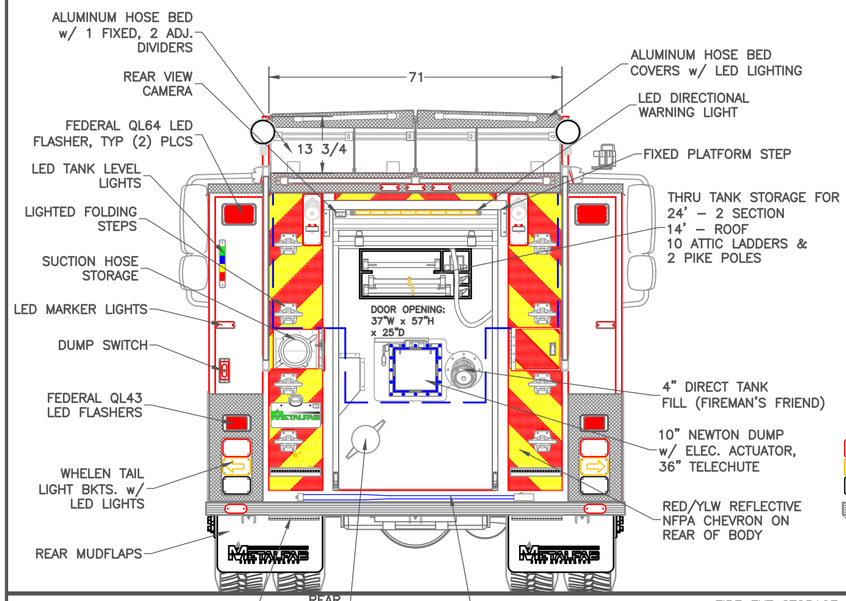

REAR

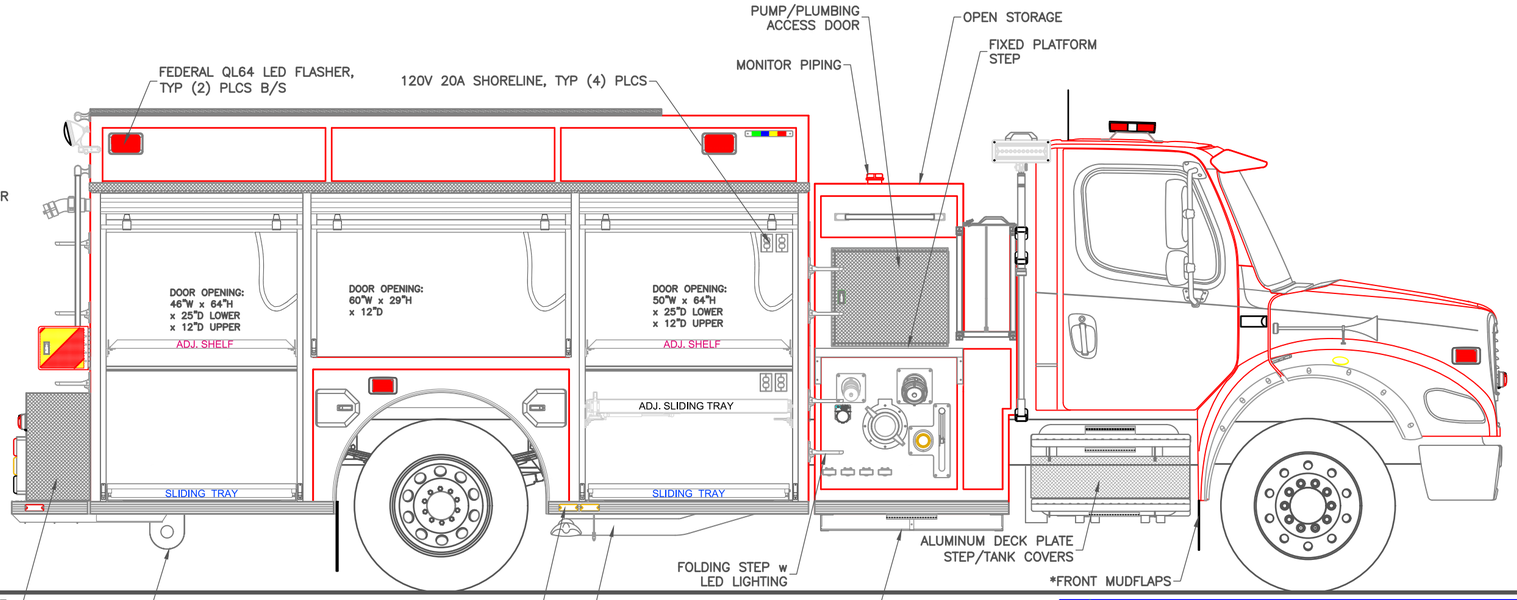

RIGHT SIDE

REV	DESCRIPTION	BY	DATE
3	UPDATE TO MATCH CHANGE ORDER A FEB 22, 2023	HDS	MAR 8, 2023
2	UPDATE TO MATCH SHOP ORDER AUGUST 15, 2022	HDS	AUG 17, 2022
1	UPDATE TO MATCH SHOP ORDER	HDS	JULY 22, 2022
0	FIRST ISSUE	----	----

REVISIONS

CHASSIS: FREIGHTLINER M2 112 2 DOOR
PUMP: HALE QFLO 1050 IGPM SPLIT SHAFT
TANK: 1200 Imp. Gal. POLYPROPYLENE

FOAM: N/A

SUCTION:
1 – 6" LEFT (ELEC. GATE)
1 – 6" RIGHT (ELEC. GATE)
1 – 6" REAR (ELEC. GATE,5" PIPE)
1 – 4" TANK TO PUMP (ELEC.)
1 – 2 1/2" LEFT
1 – 2 1/2" RIGHT

DISCHARGES:
1 – 4" RIGHT (3" PIPING)
1 – 3" MONITOR
2 – 2 1/2" LEFT
2 – 2 1/2" REAR
1 – 2 1/2" RIGHT
1 – 2 1/2" TANK FILL
2 – 1 1/2" CROSSLAYS

-ALL ALUMINUM CONSTRUCTION – ALL DIMENSIONS ARE IN INCHES & APPROXIMATE

BEERSVILLE FIRE DEPARTMENT

JOB No.	22508
DRAWN BY	T CULLINS
DATE	08-09-21

METALFAB LTD.
847 CENTRAL ST. CENTREVILLE
NB. CANADA E7K 2E8

TITLE: GENERAL ARRANGEMENT

METALFAB FIRE TRUCKS

DRAWING NO. FT-11538

REV 3