

CHASSIS: SPARTAN FC-94 MFD 10" RAISED ROOF
 PUMP: HALE SAM QMAX-XS 1250 ICMP PUMP MODULE
 TANK: 1000 Imp. Gal. POLYPROPYLENE
 FOAM: N/A

SUCTION: 1 - 6" LEFT (ELEC. GATE)
 1 - 6" RIGHT (ELEC. GATE)
 1 - 4" TANK TO PUMP (ELEC.)
 1 - 2 1/2" LEFT


DISCHARGES: 1 - 4" RIGHT (ELEC.)
 1 - 4" REAR (ELEC.)
 2 - 2 1/2" LEFT (ELEC.)
 2 - 2 1/2" REAR (ELEC.)
 1 - 2 1/2" RIGHT (ELEC.)

1 - 2" TANK FILL (ELEC.)
 2 - 1 1/2" SPEEDLAYS (ELEC.)
 1 - 1 1/2" TRASHLINE (ELEC.)


REV	DESCRIPTION	BY	DATE
4	UPDATED HOSE BED AND COVERS TO BE ENTIRE LENGTH OF THE BODY	HDS	NOV 14, 2023
3	CHANGE MECHANICAL SIREN TO THRU BUMPER; UPDATE DBL SCBA DOOR ON RS	HDS	NOV 2, 2023
2	UPDATE TO GO "IF"	TEC	JULY 4, 2023
1	UPDATE TO MARK UP TO MATCH CHANGE ORDER	HDS	NOV 3, 2022
C	UPDATE TO MATCH RYAN'S EMAIL REMOVE MONITOR, CHANGE PUMP, CHANGE LIGHT TOWER	HDS	MAY 2, 2022
0	FIRST ISSUE		

SALMON RIVER FIRE DEPARTMENT		TITLE GENERAL ARRANGEMENT	
JOB No.	22662		
DRAWN BY	T CULLINS		
DATE	01-07-22		
METALFAB LTD. 847 CENTRAL ST. CENTREVILLE NB. CANADA E7K 2E8		DRAWING NO.	FT-11544 SHT 1 OF 2
		REV	4

-ALL ALUMINUM CONSTRUCTION - ALL DIMENSIONS ARE IN INCHES & APPROXIMATE

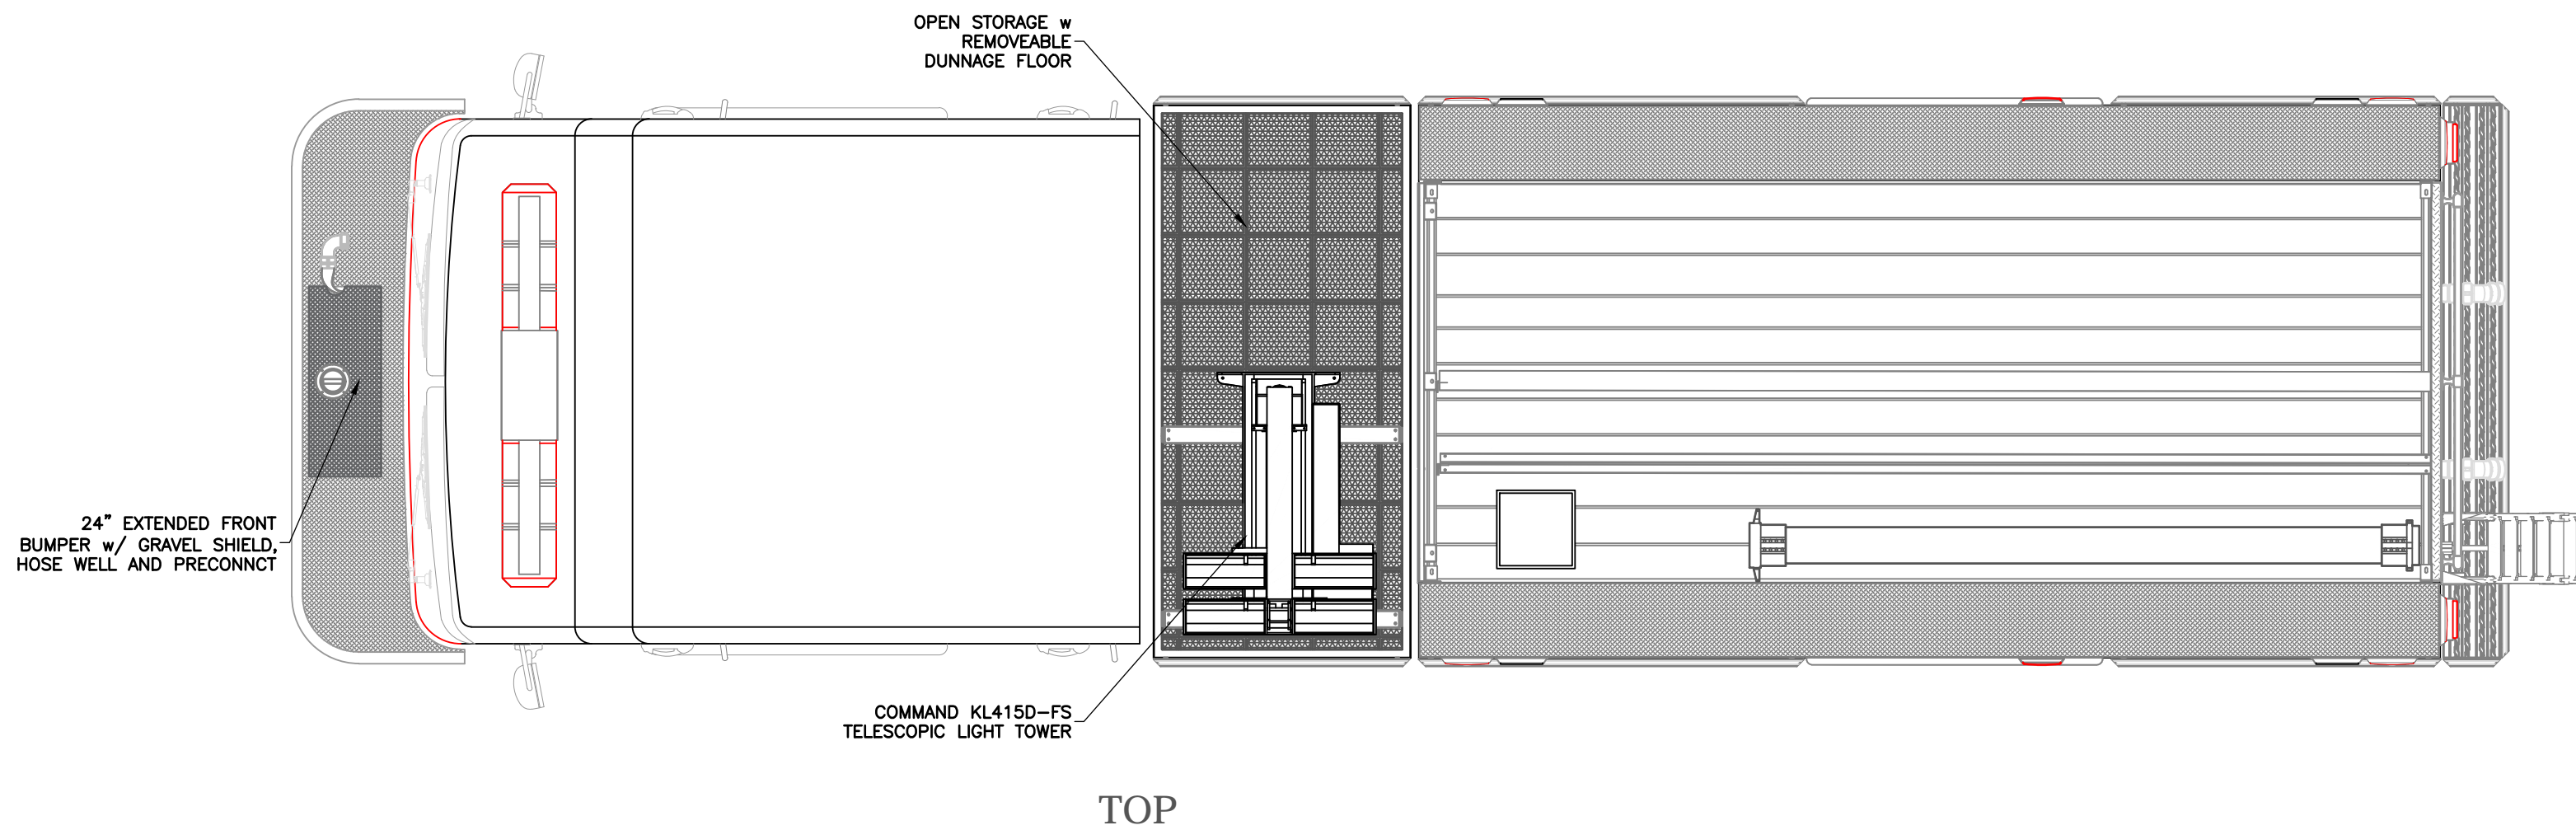

REV	DESCRIPTION	BY	DATE
4	UPDATED HOSE BED AND COVERS TO BE ENTIRE LENGTH OF THE BODY	HDS	NOV 14, 2023
3	CHANGE MECHANICAL SIREN TO THRU BUMPER; UPDATE DBL SCBA DOOR ON RS	HDS	NOV 2, 2023
2	UPDATE TO GO "IF"	TEC	JULY 4, 2023
1	UPDATE TO MARK UP TO MATCH CHANGE ORDER	HDS	NOV 3, 2022
C	UPDATE TO MATCH RYAN'S EMAIL REMOVE MONITOR, CHANGE PUMP, CHANGE LIGHT TOWER	HDS	MAY 2, 2022
0	FIRST ISSUE		

SALMON RIVER FIRE DEPARTMENT		TITLE GENERAL ARRANGEMENT	
JOB No.	22662		
DRAWN BY	T CULLINS		
DATE	01-07-22		
METALFAB LTD. 847 CENTRAL ST. CENTREVILLE NB. CANADA E7K 2E8		DRAWING NO.	FT-11544 SHT 2 OF 2
		REV	4

-ALL ALUMINUM CONSTRUCTION - ALL DIMENSIONS ARE IN INCHES & APPROXIMATE