

NOT SHOWN:

ULC S815-13 COMPLIANCE
TIRE PRESSURE INDICATORS
NON REMOVABLE KEY
CONSOLE IN CAB
*BATTERY BOOST TERMINALS
*MASTER BATTERY DISCONNECT
*BACK UP ALARM
120V 20A SHORE LINE CONNECTION IN CAB
KISSMAIL AUTOCHARGE 100% BATTERY CONDITIONER w BATTERY SAVER
ANODES IN SUCTION & DISCHARGE PIPING
PUMP ENGAGED & OK TO PUMP INDICATOR LIGHTS
(2) SUCTION SIDE RELIEF VALVE

*HEAT EXCHANGER
FOAM PICKUP HOSE
ELECTRIC DUMP CONTROL IN CAB
*ROCKER SWITCH PANEL WITH MASTER WARNING SWITCH WIRED THROUGH DIAMOND LOGIC
FEDERAL PA300 100-WATT SIREN
*DOOR AJAR WARNING LIGHT
*EQUIPMENT RACK NOT STOWED WARNING LIGHT
ADDITIONAL CAB LIGHTING
LED TUBE COMPARTMENT LIGHTING
4" LED STEP LIGHTS FOR BODY STEPS
INSTALLATION OF CUSTOMER SUPPLIED RADIOS
DRIP PANS UNDER (4) ROLL-UP DOORS

COMPARTMENT MATTING INTERLOCKING TILE
KROHNE RUST PROTECTION UNDERCOAT
BUFFED COMPARTMENT FINISH
DIAMOND LOGIC ELECTRIC SYSTEM MGMT
TRIDENT AUTOMATIC AIR PRIMER
REFLECTIVE STRIPING
RUBBER SEAL AROUND SUCTION/DISCHARGE OPENINGS ON PANEL
HEATER IN PUMPHOUSE
CLASS 1 TP04+ ENGINE GOVERNOR
LED ENGINE COMPARTMENT LIGHTS
ADDITIONAL AIR TANK
FEDERAL 100W SIREN SPEAKER



LABELS:

FLUID CAPACITY PLATE
PUMPING TEST PLATE
MAXIMUM RIDERS SIGN (2 PERSONS)
SEAT BELT WARNING LABELS
APPARATUS INFORMATION LABEL
REAR STEP WARNING LABEL
ULTRA LOW SULFUR DIESEL ONLY
FOAM CONCENTRATE LABEL AT FOAM TANK FILL
DO NOT MOVE APPARATUS WHEN LIGHT IS ON

ACCESSORIES:

(2) 6" x 10' LIGHTWEIGHT SUCTION HOSE (TUBE MOUNTED)
5" FLOATING STRAINER (SHIPPED LOOSE)
(2) HOSE WRENCHES (DOUBLE) w HOLDER ON PANELS
24" 2-SECTION EXTENSION LADDER (MOUNTED)
14" ALUM ROOF LADDER (MOUNTED)
10' ALUM FOLDING ATTIC LADDER (MOUNTED) w BRACKETS

(2) 1 1/2" x 100' HOSE MODEL 8D15X100Y15 w NPSH THREAD
(4) 2 1/2" x 100' HOSE MODEL 8D25X100Y25 w NS21 THREAD
4" STORK TO 2 1/2" SWIVEL FEMALE w CP PLUG (INSTALLED ON THE 4" DIRECT TANK FILL)

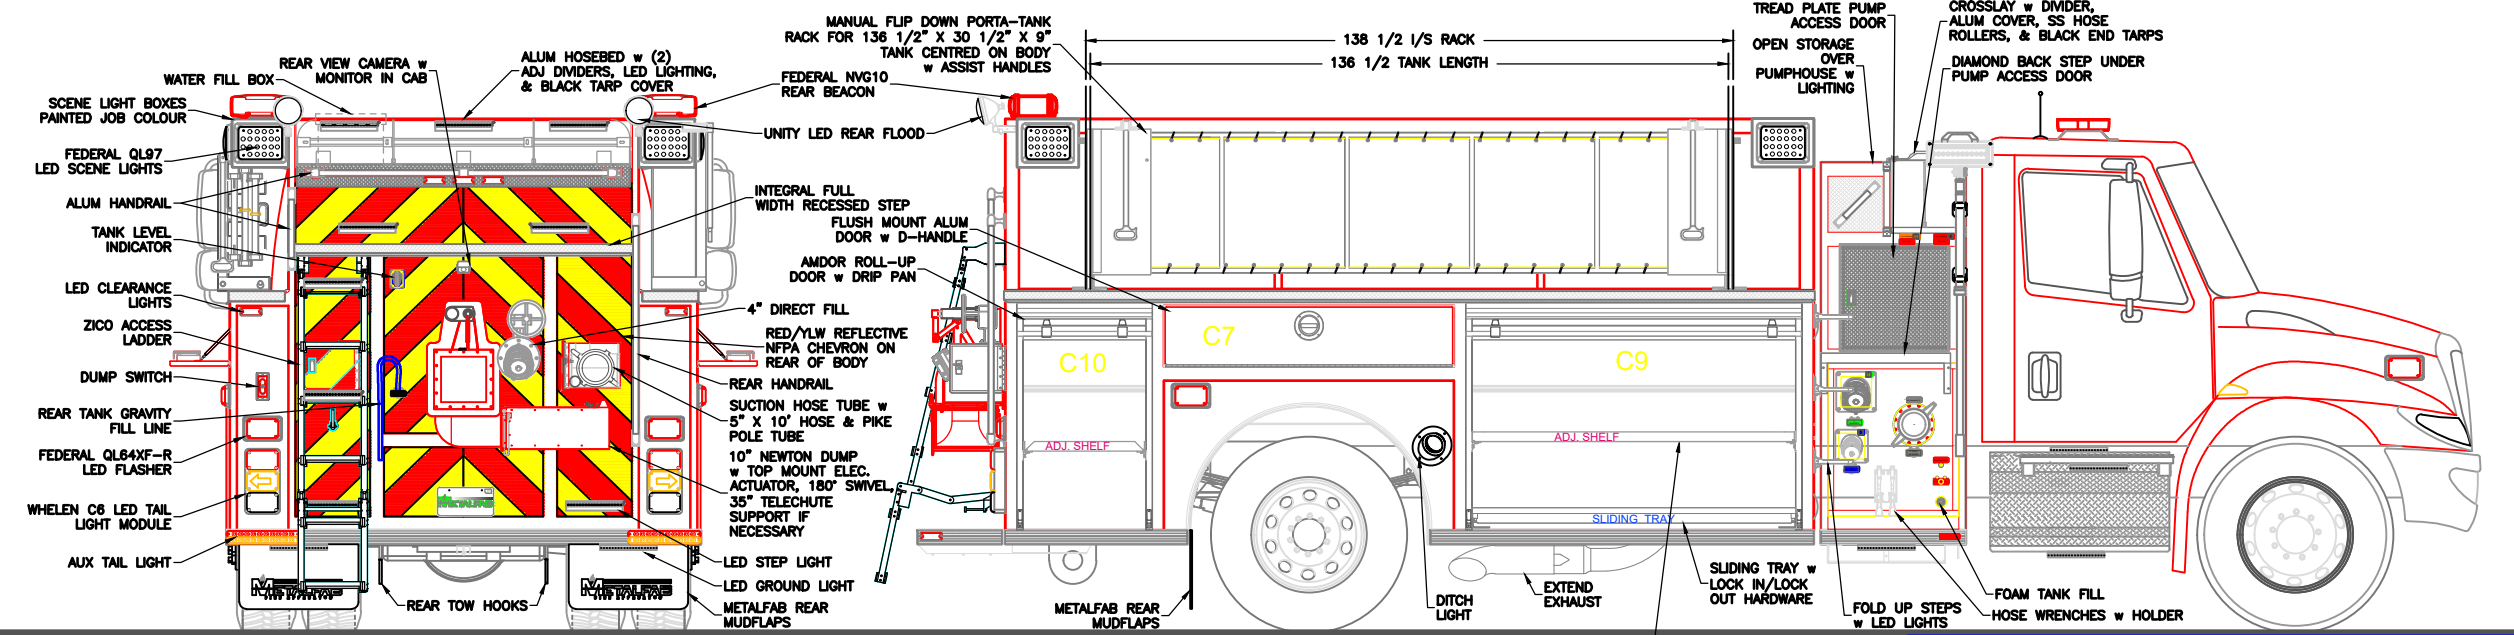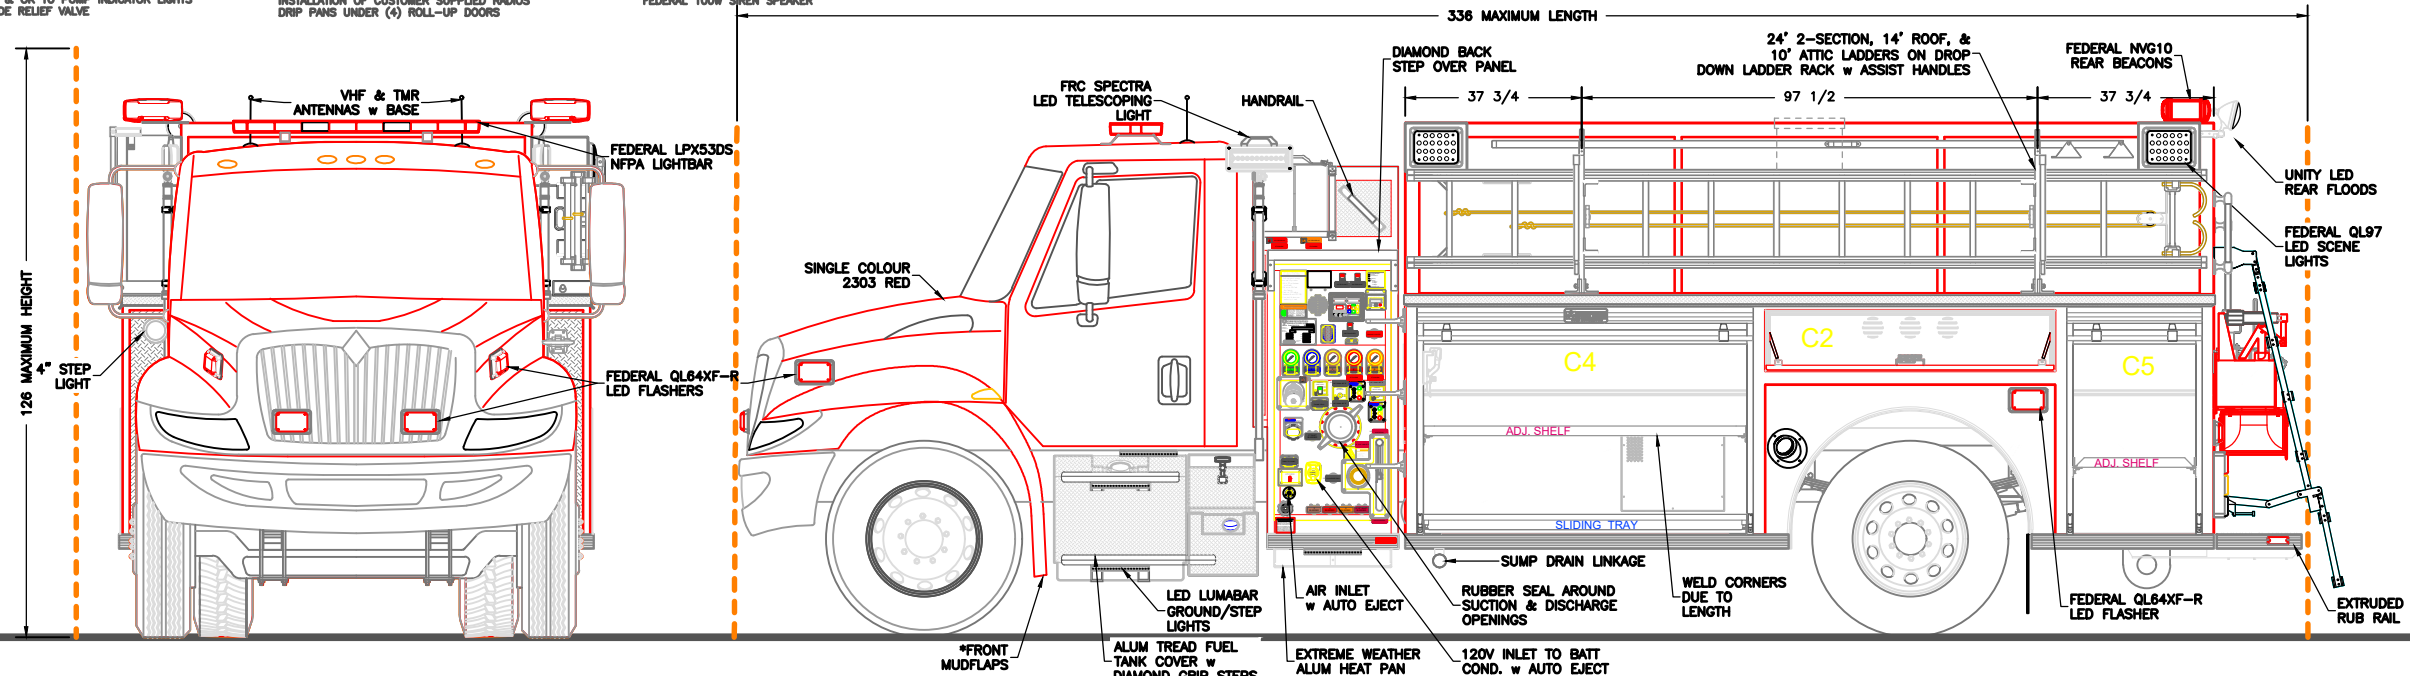

CHASSIS: INTERNATIONAL MV607 SBA TWO DOOR
PUMP: HALE MG MIDSHIP PUMP 625 IGPM
TANK: 1500 IMP GAL POLYPROPYLENE
1-20 IMP GAL FOAM CELL
FOAM: HYPRO FOAMPRO 1600

SUCTION: 1-5" RIGHT (ELEC. GATED)
1-5" LEFT (ELEC. GATED)
1-3" TANK TO PUMP (4" PIPING)
1-2 1/2" LEFT

DISCHARGES: 1-4" RIGHT
1-2 1/2" RIGHT
1-2 1/2" LEFT
1-2" TANK FILL
2-1 1/2" CROSSLAYS (BOTH FOAM)

* - INCLUDED w/ CHASSIS

REV	DESCRIPTION	BY	DATE
0	FIRST ISSUE		
REVISIONS			
NORTH EAST MARGAREE FIRE DEPARTMENT		TITLE GENERAL ARRANGEMENT	
DRAWN BY: 20549 HDS			
DATE: 09/16/19			
METALFAB LTD. 847 CENTRAL ST. CENTREVILLE NB. CANADA E7K 2E8		DRAWING NO. 20549-19	REV 0