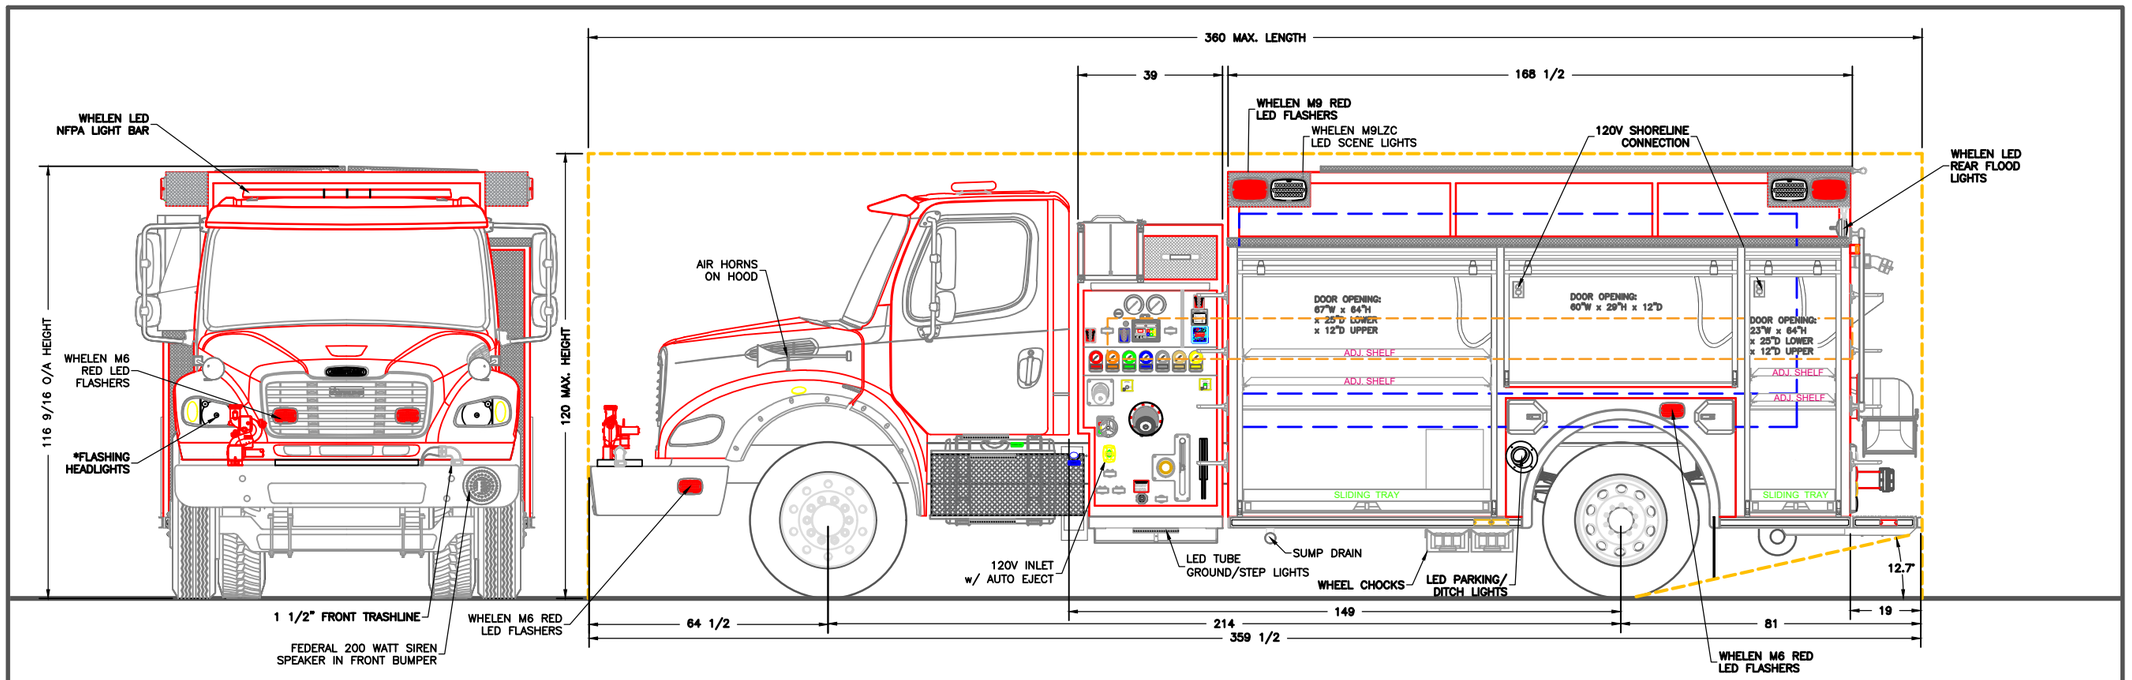

FRONT

LEFT SIDE

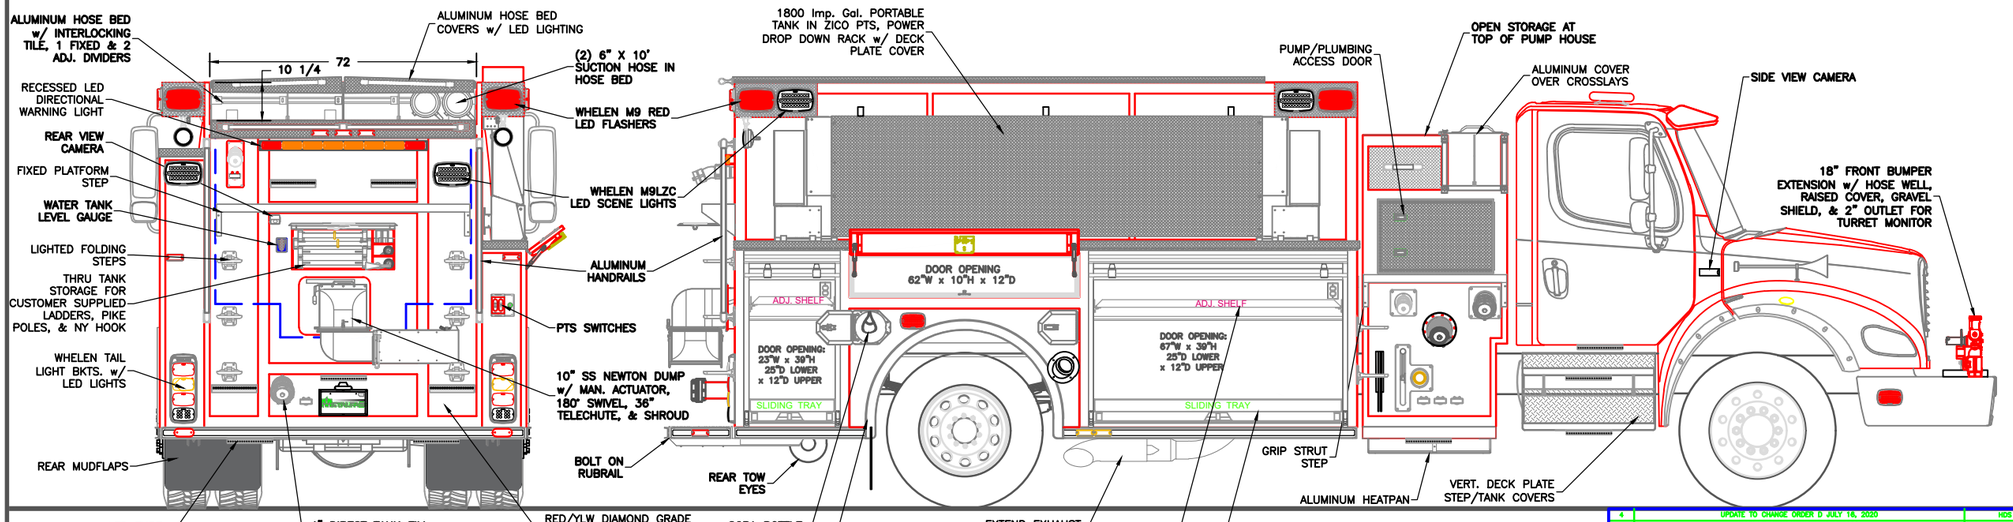

REAR

RIGHT SIDE

REV	DESCRIPTION	BY	DATE
4	UPDATE TO CHANGE ORDER D JULY 16, 2020	HDS	JULY 22, 2020
3	UPDATE TO MARK UP JULY 2, 2020	HDS	JULY 6, 2020
2	MARK UP APRIL 24, 2020	HDS	APRIL 24, 2020
1	SHOP ORDER REVIEW UPDATE	HDS	MARCH 17, 2020
0	FIRST ISSUE	------	------

REVISIONS

CHASSIS: FREIGHTLINER M2 112 2 DOOR
PUMP: HALE RSD 1050 IGPM PTO DRIVE
TANK: 1500 Imp. Gal. POLYPROPYLENE

FOAM:

SUCTION:
1 – 6" LEFT (MAN. GATE)
1 – 6" RIGHT
1 – 3" TANK TO PUMP
1 – 2 1/2" LEFT
1 – 2 1/2" RIGHT

DISCHARGES:
1 – 4" RIGHT
1 – 3" TANK FILL
1 – 2 1/2" LEFT
1 – 2 1/2" RIGHT
1 – 2 1/2" REAR (LS UNDER HOSE BED)
1 – 2" FRONT TURRET
2 – 1 1/2" CROSSLAYS
1 – 1 1/2" FRONT TRASHLINE

–ALL ALUMINUM CONSTRUCTION – ALL DIMENSIONS ARE IN INCHES & APPROXIMATE

MIDDLESEX CENTER FIRE DEPARTMENT

JOB No. 21318
DRAWN BY T CULLINS
DATE 09-20-19

METALFAB LTD.
847 CENTRAL ST. CENTREVILLE
NB. CANADA E7K 2E8

TITLE GENERAL ARRANGEMENT

METALFAB FIRE TRUCKS

DRAWING NO. FT-11250 SHT 1 OF 2

REV 4